

Ex-isolated driver

5105B

- 1- or 2-channel version
- 3- / 5-port 3.75 kVAC galvanic isolation
- Driver for Ex / I.S. area
- 20 programmable measurement ranges
- Universal supply by AC or DC



Application

- Safety barrier for current signals transmitted to I/P converters and displays mounted in hazardous area.
- Safety barrier for analog current / voltage signals transmitted to hazardous area.
- 1 : 1 signal conversion of analog current / voltage signals.


Technical characteristics

- The 20 factory-calibrated measurement ranges in the 5105B can be selected by the internal DIP-switches without the need for a recalibration. Special measurement ranges can be delivered.
- PR5105B is based on microprocessor technology for gain and offset. The analog signal is transmitted at a response time of less than 25 ms.
- Inputs, outputs, and supply are floating and galvanically separated.

Mounting / installation

- Mounted vertically or horizontally on a DIN rail. By way of the 2-channel version up to 84 channels per meter can be mounted.

Connections

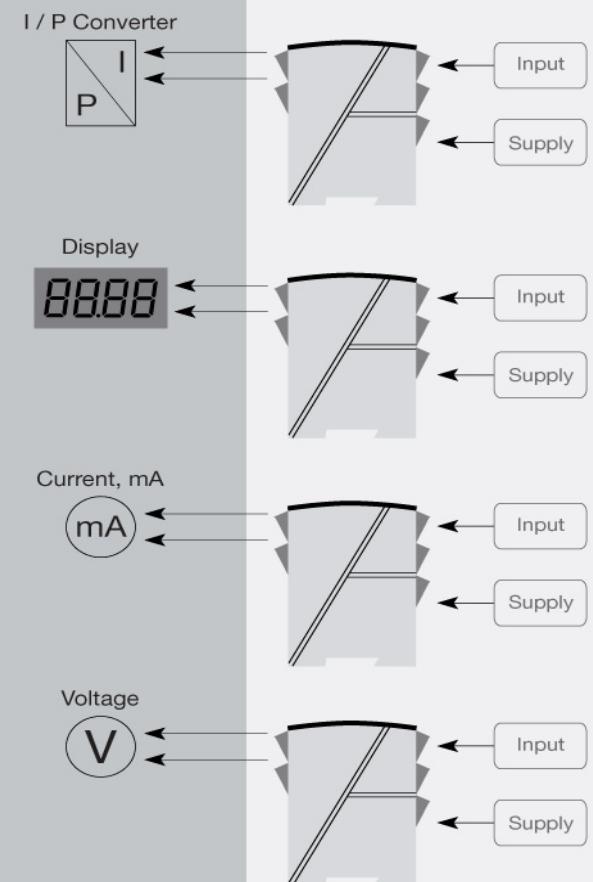

Order:

Type	Input	Output	Channels	
5105B	0...20 mA 4...20 mA 0...10 V 2...10 V Special	: A : B : E : F : X	Special : 0 0...20 mA : 1 4...20 mA : 2 0...1 V : 4 0.2...1 V : 5 0...10 V : 6 2...10 V : 7	Single : A Double : B

Environmental Conditions

Specifications range..... -20°C to +60°C
 Calibration temperature..... 20...28°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree..... IP20

Mechanical specifications

Dimensions (HxWxD)..... 109 x 23.5 x 130 mm
 Weight approx..... 225 g
 DIN rail type..... DIN 46277
 Wire size..... 1 x 2.5 mm² stranded wire
 Screw terminal torque..... 0.5 Nm
 Vibration..... IEC 60068-2-6 : 2007
 Vibration: 2...25 Hz..... ±1.6 mm
 Vibration: 25...100 Hz..... ±4 g

Common specifications

Supply voltage, universal..... 21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
 Fuse..... 400 mA SB / 250 VAC
 Max. power consumption..... ≤ 2 W (2 channels)
 Internal consumption..... ≤ 2 W (2 channels)
 Isolation voltage, test / working..... 3.75 kVAC / 250 VAC
 Signal / noise ratio..... Min. 60 dB (0...100 kHz)
 Response time (0...90%, 100...10%)..... < 25 ms
 Accuracy..... Better than 0.1% of selected range
 EMC immunity influence..... < ±0.5% of span
 Extended EMC immunity: NAMUR NE 21, A criterion, burst..... < ±1% of span

Input specifications

Max. offset..... 20% of max. value
 Current input: Measurement range..... 0...20 mA
 Min. measurement range (span), current input..... 16 mA
 Input resistance, current input..... Nom. 10 Ω + PTC 10 Ω
 Voltage input: Measurement range..... 0...10 VDC
 Min. measurement range (span), voltage input..... 8 VDC
 Input resistance, voltage input..... > 2 MΩ

Output specifications

Max. offset..... 20% of max. value
 Current output: Signal range..... 0...20 mA
 Min. signal range..... 16 mA
 Load (max.)..... 20 mA/770 Ω/15.4 VDC
 Load stability, current output..... ≤0.01% of span / 100 Ω
 Current limit..... ≤ 28 mA
 Voltage output: signal range..... 0...1 VDC / 0...10 VDC
 Voltage output, min. signal range..... 0.8 VDC / 8 VDC
 Load (min.)..... 500 kΩ
 *of span..... = of the presently selected range

Approvals

EMC.....	EN 61326-1
LVD 2006/95/EC.....	EN 61010-1
PELV/SELV.....	IEC 364-4-41 and EN 60742
ATEX 2004/108/EC.....	DEMKO 99ATEX126014, II (1) GD [EEx ia] IIC
UL.....	UL 913, UL 508
EAC TR-CU 020/2011.....	EN 61326-1
EAC Ex TR-CU 012/2011.....	RU C-DK.GB08.V.00410
DNV Marine.....	Stand. f. Certific. No. 2.4