


## 2-wire programmable transmitter



### 6331B

- RTD, TC, Ohm, or mV input
- Extremely high measurement accuracy
- Galvanic isolation
- Can be installed in Ex zone 0
- 1- or 2-channel version

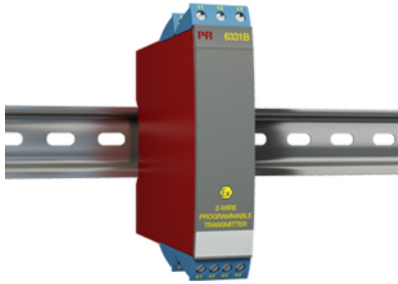

#### Application

- Linearized temperature measurement with Pt100...Pt1000, Ni100...Ni1000, or TC sensor.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.
- Amplification of a bipolar mV signal to a standard 4...20 mA current signal.


#### Technical characteristics

- Within a few seconds the user can program PR6331B to measure temperatures within all ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 2-, 3- and 4-wire connection.
- A limit can be programmed on the output signal.
- Continuous check of vital stored data for safety reasons.

#### Mounting / installation

- Mounted vertically or horizontally on a DIN rail. Using the 2-channel version, up to 84 channels can be mounted per meter.
- NB: As Ex barrier we recommend 5104B, 5114B, or 5116B.

#### Connections

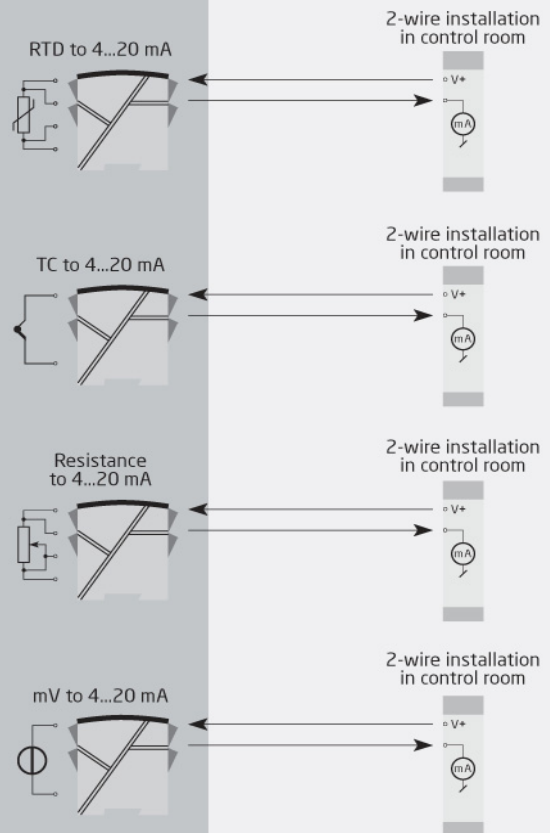

**Order:**

Type	Galvanic isolation	Channels
6331B	1500 VAC : 2	Single : A Double : B

\*NB! Please remember to order CJC connectors type 5910Ex (channel 1) and 5913Ex (channel 2) for TC inputs with an internal CJC.

**Environmental Conditions**

Specifications range.....	-40°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

**Mechanical specifications**

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Weight (1 / 2 channels).....	145 / 185 g <sub>2</sub>
Wire size.....	1 x 1.5 mm <sup>2</sup> stranded wire

**Common specifications**

Supply voltage.....	7.2...30 VDC
Internal consumption, per channel.....	0.17...0.8 W
Voltage drop.....	7.2 VDC
Isolation voltage, test / working.....	1.5 kVAC / 50 VAC
Isolation voltage, ch. 1 / ch. 2.....	1500 VAC
Warm-up time.....	5 min.
Communications interface.....	Loop Link
Signal / noise ratio.....	Min. 60 dB
Accuracy.....	Better than 0.05% of selected range
Response time (programmable).....	1...60 s
EEPROM error check.....	< 3.5 s
Signal dynamics, input.....	20 bit
Signal dynamics, output.....	16 bit
Effect of supply voltage change.....	< 0.005% of span / VDC
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

**Input specifications**

Max. offset.....	50% of selected max. value
RTD input.....	Pt100, Ni100, lin. R
Cable resistance per wire (max.), RTD.....	5 Ω
Sensor current, RTD.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Yes
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC).....	< ±1.0°C
Sensor error detection, TC.....	Yes
Sensor error current: When detecting / else.....	Nom. 33 μA / 0 μA
Voltage input: Measurement range.....	-12...800 mV
Min. measurement range (span), voltage input.....	5 mV
Input resistance, voltage input.....	10 MΩ

**Output specifications**

Current output: Signal range.....	4...20 mA
Min. signal range.....	16 mA
Updating time.....	440 ms
Load resistance, current output.....	≤ (Vsupply - 7.2) / 0.023 [Ω]
Load stability, current output.....	≤ 0.01% of span / 100 Ω
Sensor error indication, current output.....	Programmable 3.5...23 mA
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
*of span.....	= of the presently selected range

**Approvals**

EMC.....	EN 61326-1
ATEX 2004/108/EC.....	KEMA 06ATEX0115
EAC TR-CU 020/2011.....	EN 61326-1
EAC Ex TR-CU 012/2011.....	RU C-DK.GB08.V.00410