



Pulse isolator

9202B

- Interface for NAMUR sensors and switches
- Extended self-diagnostics and detection of cable fault
- 1 or 2 channels
- Can be supplied separately or installed on power rail, PR type 9400
- SIL 2-certified via Full Assessment



Advanced features

- Configuration and monitoring by way of detachable display front (PR 4501).
- Selection of direct or inverted function for each channel via PR 4501.
- Advanced monitoring of internal communication and stored data.
- Optional redundant supply via power rail and/ or separate supply.
- SIL 2 functionality is optional and must be activated in a menu point.

Application

- 9202B can be mounted in the safe area or in zone 2 / Cl. 1 div. 2 and receive signals from zone 0, 1, 2 and zone 20, 21, 22 including mining / Class I/II/III, Div. 1, Gr. A-G.
- Pulse isolator for transmission of signals to the safe area from NAMUR sensors and mechanical switches installed in the hazardous area.
- Monitoring of error events and cable breakage via the individual status relay and/or a collective electronic signal via the power rail.
- The 9202B has been designed, developed and certified for use in SIL 2 applications according to the requirements of IEC 61508.


Technical characteristics

- 1 green and 2 yellow/red front LEDs indicate operation status and malfunction.
- 2.6 kVAC galvanic isolation between input, output and supply.

Mounting

- The devices can be mounted vertically or horizontally without distance between neighbouring units.

Connections

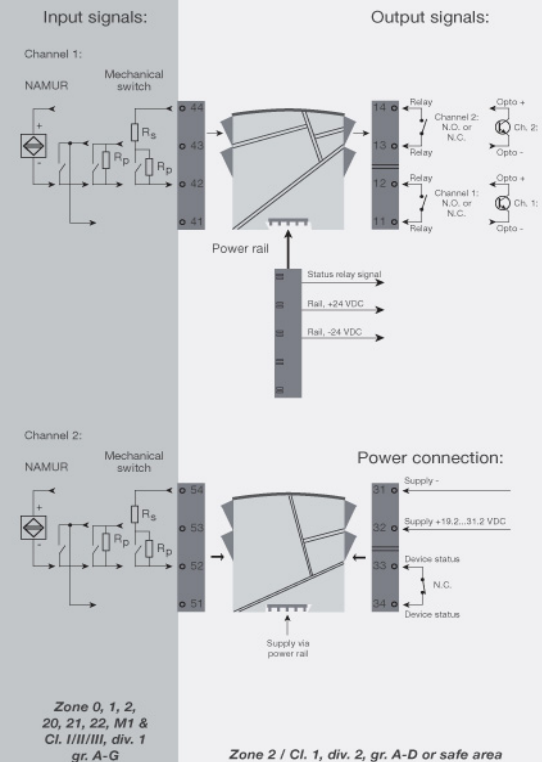

Order:

| Type | Switch | Channels |
|-------|----------------|------------|
| 9202B | Opto : 1 | Single : A |
| | Relay N.O. : 2 | Double : B |
| | Relay N.C. : 3 | |

Environmental Conditions

| | |
|------------------------------|--|
| Specifications range..... | -20°C to +60°C |
| Storage temperature..... | -20°C to +85°C |
| Calibration temperature..... | 20...28°C |
| Relative humidity..... | < 95% RH (non-cond.) |
| Protection degree..... | IP20 |
| Installation in..... | Pollution degree 2 & measurement / overvoltage cat. II |

Mechanical specifications

| | |
|---|---|
| Dimensions (HxWxD)..... | 109 x 23.5 x 104 mm |
| Dimensions (HxWxD) w/ 4501 / 4511..... | 109 x 23.5 x 116 / 131 mm |
| Weight approx..... | 170 g |
| Weight incl. 4501 / 4511 (approx.)..... | 185 g / 270 g |
| DIN rail type..... | DIN EN 60715/35 mm |
| Wire size..... | 0.13...2.08 mm ² AWG 26...14 stranded wire |
| Screw terminal torque..... | 0.5 Nm |
| Vibration..... | IEC 60068-2-6 : 2007 |
| Vibration: 2...13.2 Hz..... | ±1 mm |
| Vibration: 13.2...100 Hz..... | ±0.7 g |

Common specifications

| | |
|---------------------------------------|---|
| Supply voltage..... | 19.2...31.2 VDC |
| Fuse..... | 400 mA SB / 250 VAC |
| Max. power consumption..... | ≤ 3 W (2 channels) |
| Isolation voltage, test /working: | |
| Input to any..... | 2.6 kVAC / 300 VAC reinforced isolation |
| Analogue output to supply..... | 2.6 kVAC / 300 VAC reinforced isolation |
| Output 1 to output 2..... | 1.5 kVAC / 150 VAC reinforced isolation |
| Status relay to supply..... | 1.5 kVAC / 150 VAC reinforced isolation |
| Communications interface..... | Communication enabler 4511 / Programming front 4501 |
| Response time for cable fault..... | < 200 ms |
| Auxiliary supplies: NAMUR supply..... | 8 VDC / 8 mA |

Input specifications

| | |
|------------------------------|--|
| Sensor types..... | NAMUR according to EN 60947-5-6 / mechanical contact |
| Frequency range..... | 0...5 kHz |
| Min. pulse length..... | > 0.1 ms |
| Input resistance..... | Nom. 1 kΩ |
| Trig level, signal..... | < 1.2 mA, > 2.1 mA |
| Trig level, cable fault..... | < 0.1 mA, > 6.5 mA |

Output specifications

| | |
|--|-------------------|
| Relay output: Max. switching frequency..... | 20 Hz |
| Max. voltage..... | 250 VAC / 30 VDC |
| Max. current..... | 2 AAC / 2 ADC |
| Max. AC power..... | 500 VA / 60 W |
| Max. voltage, status relay..... | 110 VDC / 125 VAC |
| Max. current, status relay..... | 0.3 ADC / 0.5 AAC |
| Max. AC power, status relay..... | 62.5 VA / 32 W |
| Opto, NPN outputs: Max. switching frequency..... | 5 kHz |
| Min. pulse length, NPN output..... | > 0.1 ms |
| Max. load, current / voltage..... | 80 mA / 30 VDC |
| Voltage drop at 80 mA..... | < 2.5 VDC |

Approvals

| | |
|----------------------------|--|
| EMC..... | EN 61326-1 |
| LVD 2006/95/EC..... | EN 61010-1 |
| ATEX 2004/108/EC..... | KEMA 07ATEX0146 X |
| IECEx..... | KEM 06.0039X |
| FM..... | 3034430-C |
| INMETRO..... | NCC 12.1307 X |
| UL..... | UL 61010-1 |
| EAC TR-CU 020/2011..... | EN 61326-1 |
| EAC Ex TR-CU 012/2011..... | RU C-DK.GB08.V.00410 |
| CCOE..... | P337349/5 |
| DNV Marine..... | Stand. f. Certific. No. 2.4 |
| SIL..... | SIL 2 certified & fully assessed acc. to IEC 61508 |